



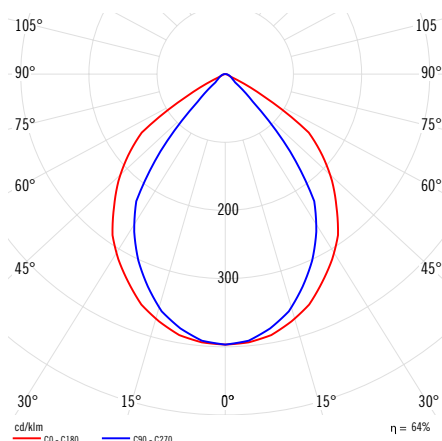

Serie / series / série: **ECO HIT**



Beam Diameter (mm)	Beam Angle (°)	Beam Spread (mm)	E(0°)	E(C90)	E(C0)
0.51	96.4°	0.75 / 1.12	5460	1405	610
1.02	73.6°	1.50 / 2.24	1365	351	203
1.53	55.2°	2.24 / 3.36	607	156	90
2.04	41.4°	2.99 / 4.47	341	88	51
2.55	31.0°	3.74 / 5.59	218	56	32
3.0	23.2°	4.49 / 6.71	152	39	23

Legend: C0 - C180 (96.4°) in red, C90 - C270 (73.6°) in blue.

Ref. **03250-XXXX**

	- 0	- 1	- 2	
* Colores:	blanco	negro	gris	
* Colours:	white	black	grey	
* Couleurs:	blanc	noir	gris	
* Temp. color/colour/couleur:	- C	- N	- E	- F
	830	840	930	940
* Ángulo / Angle / Angle:	- 9 90°			
* Lámpara / lamp / lampe:	- 3	- 4	- 5	- 6
	2000LM 18W	3000LM 26W	4000LM 34W	5000LM 40W
* Dali:	- R			

DESCRIPCIÓN | DESCRIPTION | DESCRIPTION

Downlight basculante en aluminio inyectado y reflector de aluminio de alta pureza, para lámparas LED.

Downlights for LED. Tilting downlight in die cast aluminium with an aluminium reflector with high purity.

Downlights pour LED. Downlight basculant en aluminium injecté, avec un réflecteur en aluminium d'haute pureté.


INSTALACIÓN | INSTALLATION | INSTALLATION

Empotrable cuadrado 215 x 135 mm

Square embedding 215 x 135 mm

Encastración carré 215 x 135 mm

CARACTERÍSTICAS TÉCNICAS | TECHNICAL FEATURES | CARACTÉRISTIQUES TECHNIQUES



CERTIFICADOS DE CALIDAD | QUALITY CERTIFICATE | CERTIFICAT DE QUALITÉ



FECHA DE ACTUALIZACIÓN / UPDATED ON:
DATE D'ACTUALISATION:

4-04-2016

Tel: +34 937 154 712
Fax: +34 937 154 713
www.nexia.es
www.facebook.com/nexialighting
www.twitter.com/nexialighting