



Serie / series / série: **Panel LED
600 x 600
Prismatico**

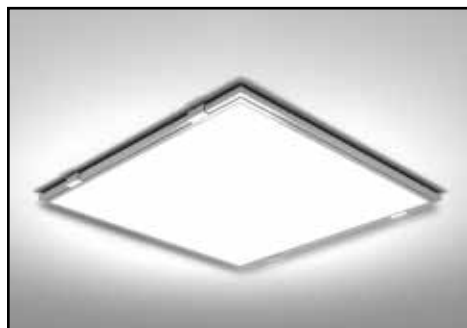

L = 596 mm H = 13,5 mm W = 596 mm



ACCESORIOS


13901 - KIT SUSPENSIÓN



13902 - KIT SUPERFICIE PARA FALSO TECHO



13903 - KIT ANCLAJE FALSO TECHO



Tel: +34 937 154 712
Fax: +34 937 154 713
www.nexia.es
www.facebook.com/nexialighting
www.twitter.com/nexialighting

Ref. **13111-XXX**

- 0

* Colores: blanco
* Colours: white
* Couleurs: blanc

* Temp. color/colour/couleur: **- C - N**
830 840

* Ángulo / Beam angle / Angle:

* Lámpara / Lamp / Lampe: **- A**
4650 lm
32 w

DESCRIPCIÓN | DESCRIPTION | DESCRIPTION

- Panel led empotrable, cuerpo en lamina de acero, difusor microprismatico (MPRM).
- LED recessed luminaire rolled steel body, microprismatic diffuser (MPRM).
- Pannel à led encastré, en acier, avec un diffuseur prismatic (MPRM).

INSTALACIÓN | INSTALLATION | INSTALLATION

- Instalación en techo armstrong o falso techo, suspendido o adosado con accesorios (no incluidos)
- Installation to armstrong ceiling suspended or embed with accesories. (accesories not supplied).
- Facile installation à faux plafond, suspendu ou attaché avec accesoires. (accesoires non fournis).

CARACTERÍSTICAS TÉCNICAS | TECHNICAL FEATURES | CARACTÉRISTIQUES TECHNIQUES

UGR<19 4,5 Kg IP 40 1 DRIVER LED 230V

CERTIFICADOS DE CALIDAD | QUALITY CERTIFICATE | CERTIFICAT DE QUALITÉ



FECHA DE ACTUALIZACIÓN / UPDATED ON: **30-06-2016**
DATE D'ACTUALISATION: