


Serie / series / série: **INOXL**

Ref. **15930-XXXX**



120mm (1500LM / 2000LM)
135mm (3000LM / 4000LM)

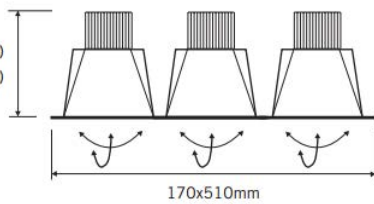

	- 0	- 1	-8	
* Colores:	blanco	negro	aluminio	
* Colours:	white	black	aluminum	
* Couleurs:	blanc	noir	aluminium	
* Temp. color/colour/couleur:	- C 830	- N 840	- E 930	- F 940
* Ángulo / Angle / Angle:	- 1 15°		- 3 36°	
* Lámpara / lamp / lampe:	- 2 1500LM 14W	- 3 2000LM 18,5W	- 4 3000LM 28W	- 5 4000LM 39,5W
* Dali:	- R			

DESCRIPCIÓN | DESCRIPTION | DESCRIPTION

Downlights en aluminio con tecnología LED. Reflector de aluminio de alta pureza 99,8%. Equipo electrónico. Alta eficiencia (+/- 110Lm/w).

LED downlights in aluminium. Aluminium reflector with high purity 99,8%. Driver enclosed. High efficiency (+/-110Lm/W)

Downlights à LED en aluminium. Réflecteur en aluminium d'haute pureté 99,8%. Haut rendement (+/-110Lm/W)

INSTALACIÓN | INSTALLATION | INSTALLATION

Empotramiento cuadrado para facilitar la instalación

Square embedding for an easier installation.

Encastrement carré pour faciliter l'installation.

CARACTERÍSTICAS TÉCNICAS | TECHNICAL FEATURES | CARACTÉRISTIQUES TECHNIQUES



CERTIFICADOS DE CALIDAD | QUALITY CERTIFICATE | CERTIFICAT DE QUALITÉ



FECHA DE ACTUALIZACIÓN / UPDATED ON:
DATE D'ACTUALISATION: **18-12-2013**

Tel: +34 937 154 712
Fax: +34 937 154 713
www.nexia.es
www.facebook.com/nexialighting
www.twitter.com/nexialighting